

# mvp table top docking station



## TABLE TOP FLEXIBILITY

The Modero® ViewPoint Table Top Docking Station (MVP-TDS) combines the handheld convenience of the Modero ViewPoint (MVPs) Touch Panels with the easily adjustable AMX-exclusive SmoothTilt™ mechanism. The docking station supports both the 7.5" and 8.4" Modero ViewPoint models (MVP-7500 and MVP- 8400). With the option to take wireless handheld control or rest the panel on the docking station, the end user experiences additional flexibility and simplicity.

## SMOOTH TRANSITION

Featuring the AMX-exclusive SmoothTilt™ mechanism, the end user can adjust the panel's display to the desired viewing angle with one hand.

## SMART SECURITY

Simply press the security release pushbutton at the bottom of the docking station and the MVP is released from the electromagnet for handheld operation.

## POWER SOURCE

When the MVP is placed onto the Table Top Docking Station, the panel's batteries automatically recharge while allowing continuous control of the surrounding integrated technology.



# mvp table top docking station

## MVP-TDS (FG5965-10)

### DIMENSIONS (HWD)

- Fully raised: 7.49" x 7.00" x 9.83" (19.02 cm x 17.78 cm x 25.00 cm)
- Fully lowered height: 4.27" (10.80 cm)

### POWER

- MVP-TDS (MVP stand-alone no batteries charging and MVP with 2 inserted batteries): 3.3 A @ 12 VDC
- MVP-TDS (stand-alone with no batteries): 0.1 A @ 12 VDC
- MVP-TDS (with 2 batteries charging): 2.1 A @ 12 VDC
- MVP-TDS (with 2 batteries charging an attached MVP panel's two internal batteries): 3.3 A @ 12 VDC

### WEIGHT

- MVP-TDS (stand-alone) 3.38 lbs (1.53 kg)
- MVP-TDS with 2 batteries: 4.57 lbs (2.07 kg)

### CHARGING FEATURES

- 2-Bays: Sequential Charging
- Charge time for two depleted batteries - 5 hours

### FRONT PANEL COMPONENTS

- Electromagnet
- MVP Interface Connector Pins: This connection provides both communication and power between the MVP and the MVP-TDS.
- MVP Support Cradle: This cradle supports a resting MVP panel and allows a user to angle the MVP LCD.
- LEDs: Two (2) blue LED indicators:
  - Left LED monitors the battery status within either the MVP-TDS or MVP
  - Right LED monitors the communication between the MVP-TDS and MVP
- Security Release pushbutton: Located on the front of the unit, this pushbutton toggles an on-screen numeric security keypad if security is enabled.

### REAR CONNECTORS

- Battery Compartment: House up to two (2) MVP-BP batteries.
- USB Connectors: Two (2) type A USB ports connect an external keyboard and mouse for use with the G4 Computer Control application.
- Power Connector: 6 mm barrel-style power jack
  - connects to an optional PS4.4 power supply connector.

### OPERATING/STORAGE ENVIRONMENTS


- Operating Temperature: 0° C (32° F) to 40° C (104° F)
- Operating Humidity: 20% - 85% RH
- Storage Temperature: -20° C (-4° F) to 60° C (140° F)
- Storage Humidity: 5% - 85% RH

### INCLUDED ACCESSORIES


- Quick Start Guide

### OPTIONAL ACCESSORIES


- MVP-7500 7.5" Modero ViewPoint Touch Panel (FG5965-01)
- MVP-8400 8.4" Modero ViewPoint Touch Panel (FG5965-02)
- MVP-BP Battery Pack (FG5965-20)
- PS4.4 Barrel Connector Power Supply (FG423-44)

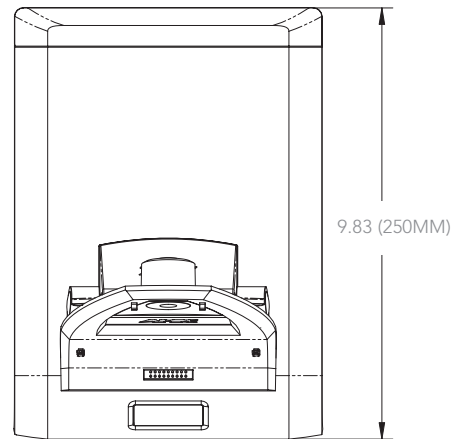


MVP-TDS (Top View)

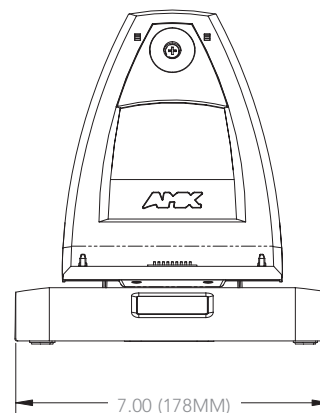

MVP-TDS (Front View)

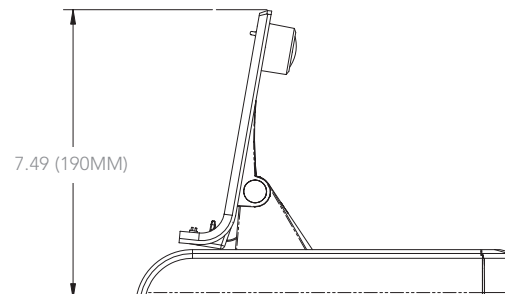

MVP-TDS (Right Side)



MVP-TDS (Rear Connection)



IT'S YOUR WORLD. TAKE CONTROL.

ARGENTINA • AUSTRALIA • BELGIUM • BRAZIL • CANADA • CHINA • ENGLAND • FRANCE • GERMANY • GREECE • HONG KONG • INDIA • INDONESIA • ITALY • JAPAN  
 LEBANON • MALAYSIA • MEXICO • NETHERLANDS • NEW ZEALAND • PHILIPPINES • PORTUGAL • RUSSIA • SINGAPORE • SPAIN • SWITZERLAND • THAILAND • TURKEY • USA  
 ATLANTA • BOSTON • CHICAGO • CLEVELAND • DALLAS • DENVER • INDIANAPOLIS • LOS ANGELES • MINNEAPOLIS • PHILADELPHIA • PHOENIX • PORTLAND • SPOKANE • TAMPA  
 3000 RESEARCH DRIVE, RICHARDSON, TX 75082 • 800.222.0193 • 469.624.8000 • +1.469.624.7400 • 469.624.7153 fax • www.amx.com