


# 3M™ Digital Projector X64

3M™ Digital Projector X64



With its 2600 ANSI lumens crisp video and data image display, the 3M™ Digital Projector X64 is ideal for business, education, multimedia and multi-purpose environments. Advanced features like personalized settings, daytime mode and anti-theft deterrents, make the 3M X64 a great tool for presenting a professional image.

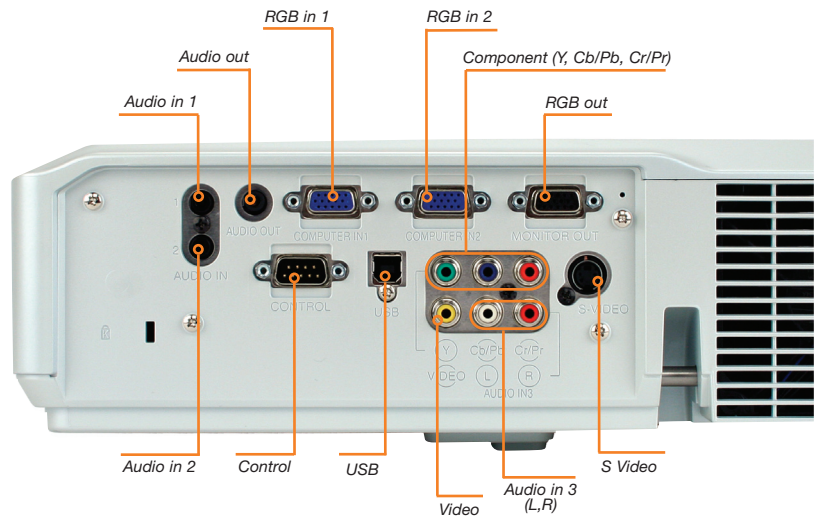

## Features

- 2600 ANSI Lumens
- Quick Start and Instant Off
- Auto Vertical Keystone
- Input Source Naming
- 7W Audio Out Sound
- "My Button" Personalized Settings
- Whiteboard and Blackboard Modes
- Vivid Image Daytime Mode
- Resolution Preset and Customization
- IR Remote Frequency Change
- Easy Change Top Lamp Door
- Side Filters with Longer Maintenance Intervals
- Security:
  - PIN-Lock
  - My Screen Lock
  - Security Bar
  - Security Label
  - Transition Detector



# 3M™ Digital Projector X64 Specifications & Accessories

## Optical

Resolution:	Native: True XGA (1024 x 768) Maximum: UXGA (1600 x 1200)
Imager set:	0.63", P-Si TFT Panel
Aspect Ratio:	4:3 Native and 16:9 Supported
Colors:	16.7 Million True Colors (24 bit)
Brightness:	2600 Lumens (Maximum Rating)
Contrast Ratio:	500:1
Projection Lens:	F: 1.7-1.9 (f=20 - 23 mm)
Screen Size (range):	30-350"
Zoom / Focus:	Manual
Zoom Ratio:	1.2:1
Optional Lenses:	NA
Lamp:	UHB 220W (Normal Mode), 172W (Whisper Mode)
Lamp Life:	2000 Hours (Normal Mode), Up to 3000 Hours (Whisper Mode)

## System Specifications

Video compatibility:	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM
SDTV/HDTV:	480i, 480p, 525i, 525p, 625i, 576i, 720p@60Hz, 750p, 1080i@60Hz, 1125i
Mouse Emulation:	USB
Keystone Correction:	Vertical: ±30°
Audio:	1 x 6W
Startup Screen:	Customizable
Noise level:	Normal 36dB; Whisper 30dB
Feature set:	Auto off, 4x digital magnification, blank
Horizontal scan:	31.5 - 106 kHz
Vertical scan:	56-120 Hz
Power consumption:	320W
Power supply:	100-120V / 220-240V, 50/60 Hz
Regulatory approvals:	UL, cUL, FCC Part 15, subpart B, Class B, CE, EN60950-1
Operating temperature:	41° - 95° F (5° ~ 35° C)
Storage temperature:	-4° - 140° F (-20° - 60° C)
Altitude:	Sea level to 6000 ft. (1,829 m)

## Size

Dimensions (W x H x D):	13.4 x 3.94 x 10.6 In. (340 x 100 x 270 mm)
Weight:	7.8 lbs / 3.5 Kg

## Technical Support

- Free unlimited software downloads and updates available on our website at [www.3m.com/meetings](http://www.3m.com/meetings)
- Toll-free 24/7 Technical Support by calling **800.328.1371**

Screen Size (Diagonal)	Image Size 4:3		Image Size 16:9	
	Projection Distance		Projection Distance	
	Minimum (m)	Maximum (m)	Minimum (m)	Maximum (m)
30" (0.8)	35" (0.9)	43" (1.1)	39" (1.0)	47" (1.2)
60" (1.5)	71" (1.8)	86" (2.2)	78" (2.0)	94" (2.4)
80" (2.0)	95" (2.4)	115" (2.9)	104" (2.6)	125" (3.2)
100" (2.5)	119" (3.0)	144" (3.6)	130" (3.3)	156" (4.0)
150" (3.8)	179" (4.6)	216" (5.5)	195" (4.9)	235" (6.0)
200" (5.1)	239" (6.1)	288" (7.3)	261" (6.6)	314" (8.0)
300" (7.6)	359" (9.1)	432" (11.0)	391" (9.9)	471" (12.0)

## Warranties

See [www.3m.com/us/meetings/warranties](http://www.3m.com/us/meetings/warranties) for details on warranties.

Projector:	3 Years or 2500 Hours Usage Standard
Lamp:	1 Year Prorated
Optional Coverage:	<i>Ultra Value Warranty Enhancement</i> – Includes free lamp, free loaner while unit is being repaired and expedited service. Not available outside U.S.

## Connections

### Computer

- 3 - RGB (2 inputs, 1 output)
- 1 - USB for Mouse Emulation
- 1 - Serial Control

### Video

- 1 - Composite
- 1 - S-Video
- 1 - Component
- 2 - Video Audio (1 input, 1 output\*)

### Audio in/out

3 - Video Audio (2 inputs, 1 output\*)

\*Audio Output is shared with Computer and Video Inputs

## Accessories Included

- Power Cords (US, UK, Europe)
- Remote Control without laser (with AA batteries)
- VGA/RGB Cable
- RCA Audio/Video Cable
- RCA Component Cable
- USB Cable
- Multi-language Operator's Guide CD
- Soft Side Carry Case
- Lens Cap



## Optional Accessories

- |  |                |
|--|----------------|
| Ultra Value Enhanced Warranty (WX64) [U.S. Only] | 78-6969-9925-5 |
| Lamp Replacement Kit (LX64)                      | 78-6966-9917-2 |
| Ceiling Mount                                    | 78-6969-9860-4 |
| Soft Rolling Bag                                 | 78-6969-9716-8 |
| University Ceiling Mount                         | 78-6969-9874-5 |

Specifications subject to change without notice.

3M and the 3M logo are trademarks of 3M Company. Used under license in Canada. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

© 3M 2007. All Rights Reserved. V08.13.07

3M Visual Systems  
Building A 147-5N-01  
6801 River Place Blvd.  
Austin, TX 78726-9000

3M Canada  
P.O. Box 5757  
London,  
Ontario, Canada  
N6A 4T1

3M Mexico, S.A. de C.V.  
Apartado Postal 14-139  
Mexico, D.F. 07070  
Mexico

## Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

## Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture for a period of 3 years or 2500 hours of usage (which ever occurs first) from the date of purchase. 3M MAKES NO OTHER WARRANTIES or CONDITIONS INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.