


mio modero elite

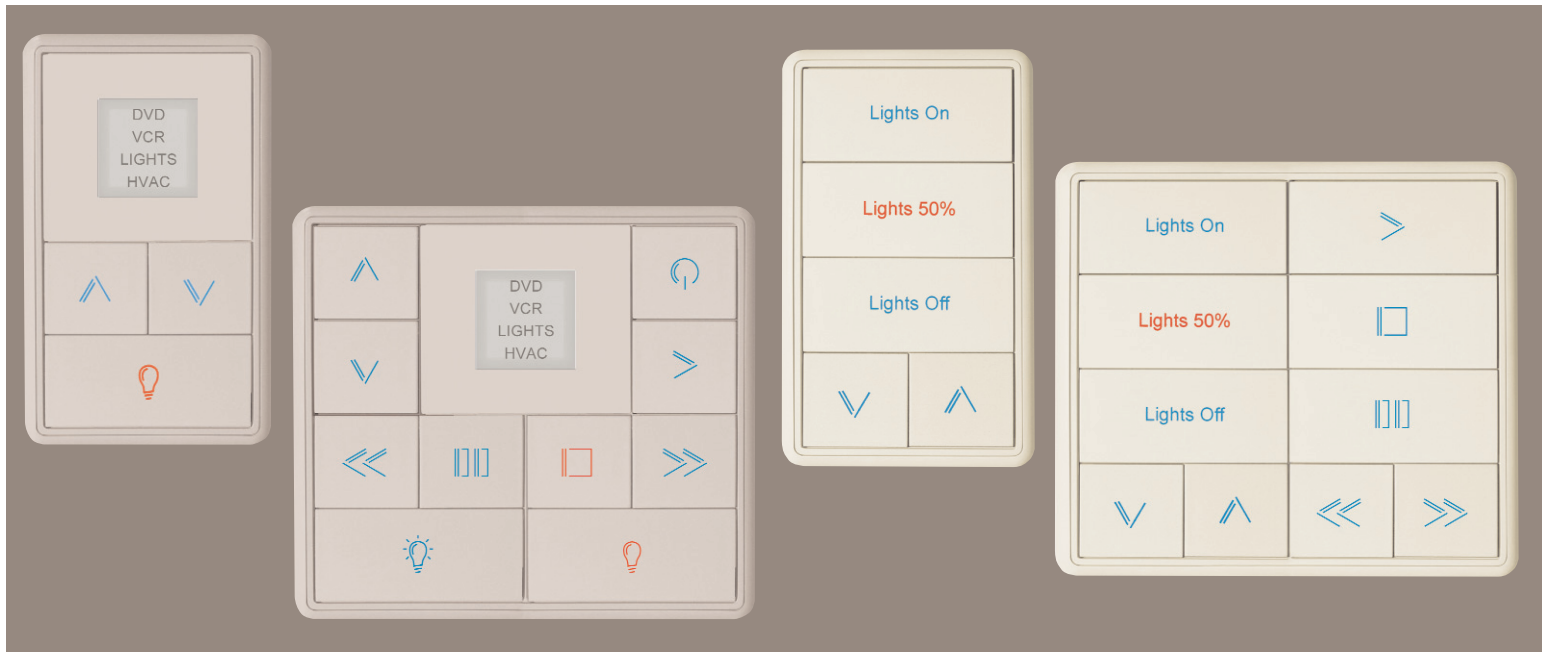

FEATURING AN LCD

The Mio Modero Elite's LCD display doubles as a button and allows the user to scroll, select and control directly on screen. The LCD screen is simple and intuitive to navigate because of an advanced new menu-driven system developed by AMX. The LCD screen shows 10 control options with up to 10 different functions offered within each option, providing 100 functions overall.

AMX took its LCD advancements one step further with a "people sensor" that enables the LCD and keys to light up upon approach. The LCD replaces four single adjacent buttons supporting up to five or thirteen engraved square buttons, respectfully.

SOPHISTICATED SOLUTION

Each button is custom engraved with text or icons that glow blue, and when selected, change to red to indicate feedback.

WORLD OF COLORS

The Mio Modero Elite is available in colors that complement the Lutron® Architectural Matte Color Collection. The single or double style keypads are available in 11 colors to coordinate into any environment – almond, beige, black, brown, gray, ivory, light almond, taupe, white, metallic gold and metallic silver.



mio modero elite

MIO-ELITE-S (FG5796-01XX)/
MIO-ELITE-D (FG5796-02XX)/
MIO-ELITE-SL (FG5796-03XX)/
MIO-ELITE-DL (FG5796-04XX)

POWER

10-18 vDC

12V CURRENT DRAW

- Eight Button Single Gang = 104mA Nominal
- Sixteen Button Double Gang = 199.7mA Nominal

FRONT PANEL COMPONENTS

- LCD (where applicable) - SPI controlled 96 x 96 pixel resolution, monochrome FSTN display with a white Electroluminescent backlight; an active button.
- Pushbuttons - a maximum of 8 buttons on the single style and 16 buttons on the double style. The Elite is backlit.
- LEDs - Red and blue LEDs indicate activity.

REAR PANEL COMPONENTS

- DIP switch - 8 position mini DIP switch used to set the device address for the keypad on the AXlink Bus.
- Wiring connection - 4 pin 3.5mm Phoenix AXlink connector.

DIMENSIONS (HWD)

- Single style - 4.46" x 2.71" x .57" (113.28 mm x 68.83 mm x 14.48 mm)
- Double style - 4.46" x 4.39" x .57" (113.28 mm x 111.51 mm x 14.48 mm)

SUPPORTED LANGUAGES

- English
- Spanish
- French
- Italian
- German
- Portuguese
- Arabic
- Mandarin Chinese
- Russian
- Japanese
- Thai
- Hindi
- Korean
- Greek

WEIGHT (RANGE)

.25 lbs (.11 kg) - .50 lbs (.23 kg)

OPERATING ENVIRONMENT

- Operating Temperature: 0° to 50° C (32° to 122° F)
- Storage Temperature: -10° to 70° C (14° to 158° F)

MOUNTING

Mounts into US and a majority of International single gang back boxes.

INCLUDED ACCESSORIES

- Single style mounting kit
- Double style mounting kit

OPTIONAL ACCESSORIES

- Additional custom buttons (FG5796-21XX - Set of 4 Custom Single Buttons, FG5796-22XX - Set of 2 Custom Double Buttons)
- Blank buttons (FG5796-07XX)
- International extension plates (for some larger wallboxes)



IT'S YOUR WORLD. TAKE CONTROL.

ARGENTINA • AUSTRALIA • BELGIUM • BRAZIL • CANADA • CHINA • ENGLAND • FRANCE • GERMANY • GREECE • HONG KONG • INDIA • INDONESIA • ITALY • JAPAN
LEBANON • MALAYSIA • MEXICO • NETHERLANDS • NEW ZEALAND • PHILIPPINES • PORTUGAL • RUSSIA • SINGAPORE • SPAIN • SWITZERLAND • THAILAND • TURKEY • USA
ATLANTA • BOSTON • CHICAGO • CLEVELAND • DALLAS • DENVER • INDIANAPOLIS • LOS ANGELES • MINNEAPOLIS • PHILADELPHIA • PHOENIX • PORTLAND • SPOKANE • TAMPA
3000 RESEARCH DRIVE, RICHARDSON, TX 75082 • 800.222.0193 • 469.624.8000 • +1.469.624.7400 • 469.624.7153 fax • www.amx.com